


HIGH PERFORMANCE. MONO CRYSTALLINE HALF CUT MBB MODULE.



NST132-6-650-670Wp-HCM-S-15.

HIGHEST PERFORMANCE THROUGH STATE-OF-THE-ART CELL TECHNOLOGY

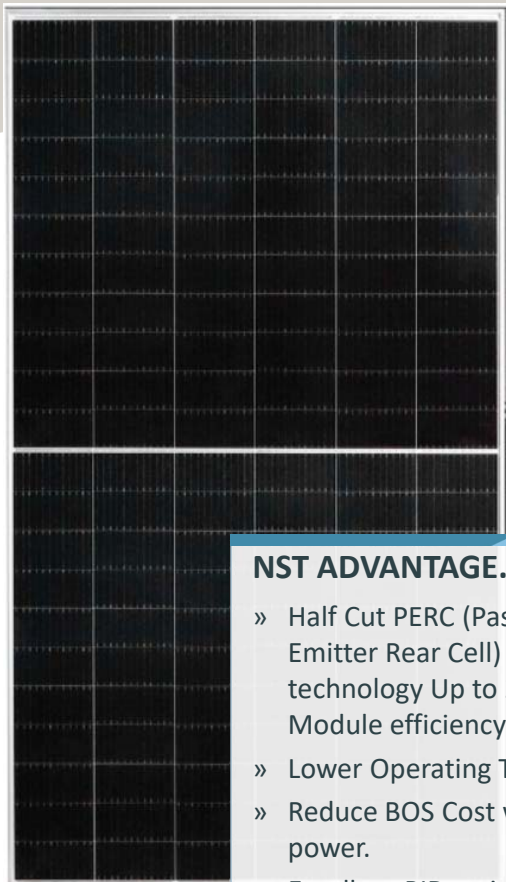

- NST ADVANTAGE.**
- » Half Cut PERC (Passivated Emitter Rear Cell) solar cell technology Up to 21.60% Module efficiency
 - » Lower Operating Temperature.
 - » Reduce BOS Cost with high power.
 - » Excellent PID resistance
 - » 1500VDC system voltage



HALF CUT PERC SOLAR CELL

Lower Resistance of Half Cut PERC Solar cells ensure higher power. Unique Cell String Layout and Split J-box reduce the energy loss from the raw shading.



HIGH EFFICIENCY

High module conversion efficiency up to 20.80% through innovative manufacturing technology.



LOW-LIGHT PERFORMANCE

Advanced glass and solar cell surface texturing allow for excellent performance in low-light environments.




SEVERE WEATHER RESILIENCE

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



DURABILITY AGAINST EXTREME ENVIRONMENTAL CONDITIONS

High salt mist and ammonia resistance certified by KIWA.



25-YEARS LINEAR PERFORMANCE WARRANTY

12-years limited warranty for materials and workmanship. NST guarantees that each module shall deliver the following minimum output as shown in the datasheet for.

About NOOR Solar Technology (NST)

NST is a leading provider and manufacturer of smart energy solutions with high performance and top quality standards. NST products are ideal for utility-scale PV power plants, as well as residential and commercial rooftop installations. NST and its trusted technology partners provide innovative renewable energy solutions meeting the highest standards in terms of reliability, safety and durability – guaranteed by one of the world-leading re-insurance groups. With NST's premium products, investors and owners enjoy long-term returns on investment and savings on their electricity bill.



PREMIUM PRODUCTS – PREMIUM RESULTS!

HIGH PERFORMANCE. MONO CRYSTALLINE HALF CUT MBB MODULE.



NST132-6-650-670Wp-HCM-S-15.

ENGINEERING DRAWINGS & TECHNICAL PARAMETERS

PHYSICAL PARAMETERS	
Solar Cell	Monocrystalline silicon 210 mm
Cell Configuration	132 cell (22 x 6)
Module Dimension	2384 x 1303 x 35 mm
Weight	34.5 kgs
Superstrate	3.2 mm, High Transmission, Low Iron, Tempered ARC Glass
Substrate	White Backsheet
Frame	Silver Anodized Aluminum Alloy Type 6063T5, Silver Color
J-Box	IP68, 1500VDC, 3 Bypass Diodes
Cables	4.0 sqmm (12AWG), 500 mm Length (Customer Demand)
Connector	IP68 MC4 Compatible

ELECTRICAL PARAMETERS (STC)					
TYPE	NST132-6-650M	NST132-6-655M	NST132-6-660M	NST132-6-665M	NST132-6-670M
Rated Maximum Power at STC (Wp)	650	655	660	665	670
Open Circuit Voltage Voc (V)	45.65	45.85	46.05	46.25	46.45
Maximum Power Voltage Vmpp (V)	37.65	37.85	38.05	38.25	38.45
Short Circuit Current Isc (A)	17.27	17.27	17.35	17.39	17.43
Maximum Power Current Imp (A)	18.27	18.31	18.35	18.39	18.43
Module Efficiency (%)	20.90	21.10	21.20	21.40	21.60

STC: Irradiance 1000W/m², Cell Temperature 25°C, air mass 1.5


ELECTRICAL PARAMETERS (NOCT)					
TYPE	NST132-6-650M	NST132-6-655M	NST132-6-660M	NST132-6-665M	NST132-6-670M
Max Power Pmax (Wp)	409.3	494.1	497.9	501.7	505.5
Open Circuit Voltage Voc (V)	43	43.2	43.4	43.5	43.7
Max Power Voltage Vmpp (V)	35.2	35.4	35.6	35.7	35.8
Short Circuit Current Isc (A)	14.7	14.73	14.76	14.84	14.87
Max Power Current Imp (A)	13.92	13.96	13.99	14.07	14.10

NOCT: Under Normal Operating Cell Temperature, Irradiance of 800 W/m², Spectrum AM 1.5, Ambient Temperature 20°C, Wind Speed 1m/s



TEMPERATURE COEFFICIENT AND PARAMETERS	
Nominal Operating Cell Temperature (NOCT)	42°C ± 2°C
Temperature Coefficient of Pmax	-0.34%/°C
Temperature Coefficient of Voc	-0.26%/°C
Temperature Coefficient of Isc	0.050%/°C
Operating Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC
Limiting Reverse Current	30A
Maximum Series Fuse Rating	30A
Power Tolerance (W)	0 to +3%
Application Class	Class A
Wind and Snow Front Load	Up to 5,400 Pa
Wind Back Load	2,400 Pa

PACKAGING CONFIGURATION	
Number of Modules per Container	40ft
Number of Modules per Pallet	558
Number of Pallets per Container	31
Box Dimension (L x W x H) in mm	18
Box Gross Weight (Kg)	2404 x 1145 x 1503
	1100

DIMENSION OF PV MODULE UNIT

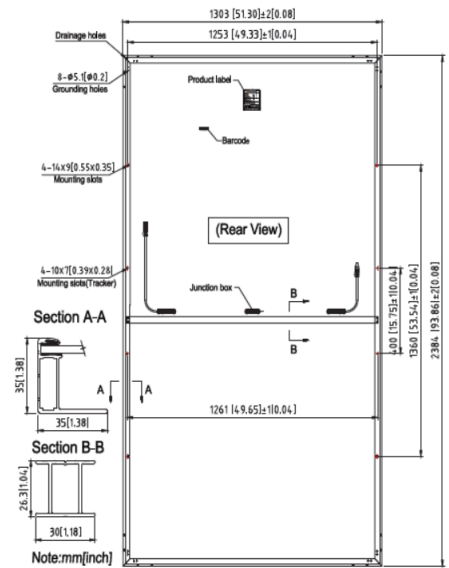

I-V CURVE

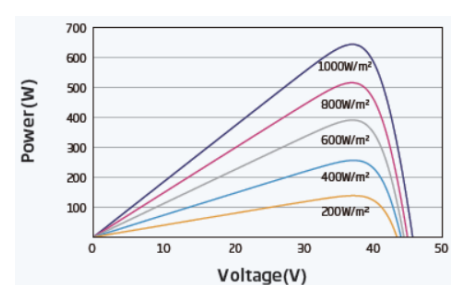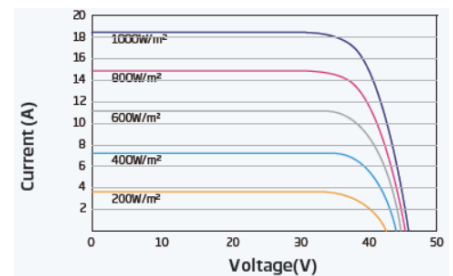

AUTHORIZED PARTNER OF NST

